



LAND CLEARING ATTACHMENTS

DESIGNED FOR DURABILITY

BUILT TO PERFORM

PRODUCT CATALOG



(844) 692.5800

info@brushfox.com

www.brushfox.com



LAND CLEARING ATTACHMENTS

XHD **BRUSH CUTTERS**

Rugged Cutter with Push Bar—3 Blade

Heavy Duty Push bar integrated with an open front design

Direct Drive Piston Motor with reversable valve block positioning

1/4" REINFORCED Steel Decking

Hydraulic Motor with Pressure Relief

Three (3) Heated treated offset blades

Comes Standard with Motor Cover, Hoses, and Couplers



High Torque

26-40 GPM

Direct Drive Motor

High Strength

3 BLADE

Design

Up to

8.0"

Material

<u>MODEL</u>	<u>OAW</u>	<u>Cut</u>	<u>GPM</u>	<u>Weight (lbs)</u>	<u>Brush Size</u>
XHD72HF	76"	72 "	26-40	1350	8"
XHD78HF	82"	78 "	26-40	1400	8"



LAND CLEARING ATTACHMENTS

MAXHD

BRUSH CUTTER—MULCHER

Direct Drive Piston – 4 Blade Plus Carbides

Extreme Open Front design allow Blades to engage toughest vegetation efficiently.

Direct Drive Piston Motor with reversable valve block positioning

1/4" REINFORCED Steel Decking

Hydraulic Motor with Pressure Relief

Four (4) Heated Treated Offset blades

(24) Carbide Tipped Mulching Teeth

Comes Standard with Motor Cover, Hoses, and Couplers



High Torque

30-45 GPM

Direct Drive Motor

High Strength

4 BLADE

Design

Up to

10.0"

Material

<u>MODEL</u>	<u>OAW</u>	<u>Cut</u>	<u>GPM</u>	<u>Weight (lbs)</u>	<u>Brush Size</u>
MAXHD72HF	76"	72 "	30-45	1575	10"
MAXHD78HF	82"	78 "	30-45	1645	10"



LAND CLEARING ATTACHMENTS

HDO SERIES **BRUSH CUTTER**

Durable and Powerful – 2 Blade Power

Heavy Duty Push bar integrated with an open front design.

Dependable Gearbox Design that maximizes tip speed while tuning itself to a wide variety of loaders ranging from 8 to 26 GPM.

1/4" REINFORCED Steel Decking

Two (2) Heated treated offset blades

Comes Standard with Motor Cover, Hoses, and Couplers



Gearbox Design Maximizing

15-26 GPM

High Torque

High Strength

2 BLADE

Design

Up to

5.0"

Material

<u>MODEL</u>	<u>OAW</u>	<u>Cut</u>	<u>GPM</u>	<u>Weight (lbs)</u>	<u>Brush Size</u>
HDO72LF	76"	72 "	15-20	1250	5"
HDO72STD	76"	72 "	20-26	1250	5"
HDO78STD	82"	78 "	20-26	1300	5"



LAND CLEARING ATTACHMENTS

HD SERIES BRUSH CUTTERS

Dependability and Simplicity- 2 Blade Power


Front design allow Blades to engage vegetation aggressively.

Dependable Gearbox Design that maximizes tip speed while tuning itself to a wide variety of loaders ranging from 8 to 26 GPM.

Gearbox and motor cover

1/4" REINFORCED Steel Decking

Comes Standard with Motor Cover, Hoses, and Couplers

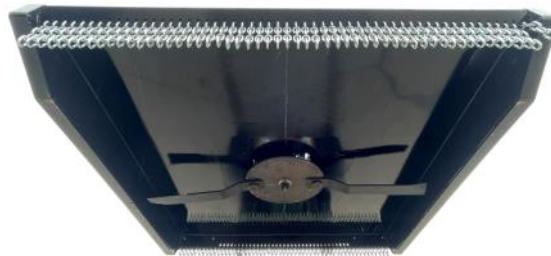

Gearbox Design Maximizing

8-26 GPM

High Torque

High Strength

2 BLADE

Design

Up to

4.0"

Material

<u>MODEL</u>	<u>OAW</u>	<u>Cut</u>	<u>GPM</u>	<u>Weight (lbs)</u>	<u>Brush Size</u>
HD42LF	48"	42"	8-15	515	2"
HD66LF	70"	66"	15-20	1100	3"
HD72LF	76"	72"	15-20	1200	3"
HD72STD	76"	72"	20-26	1200	4"
HD78STD	78"	78"	20-26	1300	4"



LAND CLEARING ATTACHMENTS

HD-PTO SERIES **BRUSH CUTTERS**

Dependability and Simplicity- 2 Blade Power

Cut, clear and mulch unwanted brush,
grass and saplings

Heavy-duty design made for rugged
applications

Tail wheel is easily adjustable

Heavy-duty gear box and slip clutch

Stump Jumper designed to prevent
damage to unit

Operates both forwards and backwards

Open deck design allows easier cutting
of larger trees



Maximum Durability

7 Gauge

Steel

High Strength

2 BLADE

Design

Up to

4.0"

Material

<u>MODEL</u>	<u>HP Range</u>	<u>Cut Width</u>	<u>Hitch</u>	<u>Weight (lbs)</u>	<u>Brush Size</u>
HD60 3PT	25-55 HP	60"	Cat I	1040	3"
HD72 3PT	40-90 HP	72"	Cat I&II	1240	4"



LAND CLEARING ATTACHMENTS

CXA SERIES

EXCAVATOR BRUSH CUTTERS

Rugged and Powerful Blade Power

- Blades 10" long & 1/2" thick
- Includes 1/4" safety chains
- Deck Thickness 3/16"
- Heavy Duty Deck
- Clockwise Rotation
- Motor protection is handled by a hydraulic pressure relief valve
- Includes standard hoses at 90" long, with 1/2" couplers.



CXA3600X
CXA4200X
2-Blade



CXA4800X
3-Blade
Includes Removable
Safety Cover

Gearbox Design Maximizing

12-25 GPM

Flow

High Strength

2 or 3 BLADE

Design

Up to

5.0

Material

<u>MODEL</u>	<u>Cut</u>	<u>GPM</u>	<u>Max PSI</u>	<u>Blades</u>	<u>Weight (lbs)</u>
CXA3600X	36"	12-20	3000	2	620
CXA4200X	42"	12-20	3000	2	685
CXA4800X	48"	20-25	3000	3	830



LAND CLEARING ATTACHMENTS

XTREME SERIES

EXCAVATOR BRUSH CUTTER MULCHER

Direct Drive Piston – 3 Blade Plus Carbides

(18) Carbide Tipped Mulching Teeth

Serrated Shark Tooth Cutters

Safety Chains–Removable

Heavy Duty Deck

Clockwise Rotation

Motor protection is handled by a hydraulic pressure relief valve

Comes Standard with Motor Cover, Hoses, and Couplers

Removeable Chain Guard–Left Side



High Torque

26-45 GPM

Direct Drive Motor

High Strength

3 BLADE

Design

Up to

10.0"

Material

<u>MODEL</u>	<u>Cut</u>	<u>GPM</u>	<u>Max PSI</u>	<u>Weight (lbs)</u>
4800XTREME	48"	26-38	5000	1200
5400XTREME	54"	33-45	5000	1350



LAND CLEARING ATTACHMENTS

SC SERIES SOIL CONDITIONERS

SKID STEER ATTACHMENTS

Driveline slip clutch protection

Tungsten - carbide teeth

Large solid rubber wheels

Adjustable storage Stand

Teeth are welded in a spiral



Skid Steer



Heavy Duty

Carbide Teeth

Tungsten

High Strength

10" Rotor

Direct Drive Motor

Up to

4.0"

Tilling Depth

<u>MODEL</u>	<u>OAW</u>	<u>Rotor Width</u>	<u>Teeth (Carbide)</u>	<u>Weight (lbs)</u>
SC72	79.5"	72"	88	1100
SC84	91.5"	84 "	104	1200
SC96	103.5"	96"	120	1300



LAND CLEARING ATTACHMENTS

SC SERIES SOIL CONDITIONERS

PTO ATTACHMENTS

Driveline slip clutch protection

Tungsten - carbide teeth

Large solid rubber wheels

Adjustable storage Stand

Teeth are welded in a spiral



Heavy Duty

Carbide Teeth

Tungsten

High Strength

10" Rotor

Direct Drive Motor

Up to

4.0"

Tilling Depth

<u>MODEL</u>	<u>OAW</u>	<u>Rotor Width</u>	<u>Teeth (Carbide)</u>	<u>Weight (lbs)</u>
SC72PTO	82.9"	72"	88	1275
SC84PTO	94.5"	84 "	104	1350
SC96PTO	106.5"	96"	120	1505



LAND CLEARING ATTACHMENTS

STUMP SERIES

3-POINT STUMP GRINDERS

PTO TRACTOR ATTACHMENTS

Rugged gear box supports

803 ft/lb. or torque

Heavy-duty base provides stable positioning

Designed for 25-90 HP tractors

65° swing arc



Heavy Duty

Carbide Teeth

Tungsten

Cutting Depth

12"-14"

Below Ground

Cutting Height

25"

Above Ground

<u>MODEL</u>	<u>Hitch Class</u>	<u>Rotor Size</u>	<u>Teeth (Carbide)</u>	<u>Weight (lbs)</u>
SS24PTO	Cat I, II	24"	58	700
SS34PTO	Cat II	34 "	92	1000



LAND CLEARING ATTACHMENTS

Specifications - Brush Cutters

Model	HD - 42LF	HD-66 LF	HD - 72 LF	HD - 72 STD	HD- 78 STD	HDO-72 STD	HDO-72 LF	HDO-78 STD	XHD-72 HF	XHD-78 HF
Mounting Plate	Universal Quick Attach			Universal Quick Attach		Universal Quick Attach			Universal Quick Attach	
Max Cutting Capacity	2"	3"	3"	4"	4"	5"	5	5	8"	8"
Cutting Diameter	42"	66"	72"	72"	78"	72"	72"	78"	72"	78"
Width	48"	70"	76"	76"	82"	76"	76"	82"	76"	82"
Weight	515	1100	1200	1200	1300	1250	1250	1300	1350	1400
Height	21"	23"	23"	23"	23"	23"	23"	23"	23"	23"
Overall Length	54	80"	80"	80"	80"	80"	80"	80"	80"	80"
Overall Width	48	70"	76"	76"	82"	76"	76"	82"	76"	82"
Product Blades	1/2"x3"	1/2" x4"	1/2" x4"	1/2" x4"	1/2" x4"	1/2" x4"	1/2" x4"	1/2"x4"	1/2" x4"	1/2" x4"
Blade Carrier Type	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 1/2"	LaserCut 3/4"	LaserCut 3/4"
Blade Rotation	CCW	CCW	CCW	CCW	CCW	CCW	CCW	CCW	CCW	CCW
Number of Blades	2	2	2	2	2	2	2	2	3	3
Grinding Teeth	No	No	No	No	No	No	No	No	No	No
Deck Thickness	10 Gauge	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Deck Material	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50	Grade 50
Skid Shoe Thickness/Material	3/8	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Drive Protection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Drive Type	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox	Direct Drive	Direct Drive
Motor/Gearbox Coupler	Chain Coupling	Chain Coupling	Chain Coupling	Chain Coupling	Chain Coupling	Chain Coupling	Coupling	Coupling	N/A	N/A
Operating PSI Cont	3000	3000	3000	3000	3000	3000	3000	3000	4000	4000
GPM Flow	8-15 GPM	15-20 GPM	15-20 GPM	20-26 GPM	20-26 GPM	20-26 GPM	15-20 GPM	20-26 GPM	26-40 GPM	26-40 GPM
Open or Closed Front	Closed	Closed	Closed	Closed	Closed	Open	Open	Open	Open	Open
Chains Y/N	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No

Model	MAX- HD 72 HF	MAX-HD 78HF	CXA 3600X	CXA 4200X	CXA 4800X	4800 Xtreme	5400 Xtreme
Mounting Plate	Universal Quick Attach		Excavator				
Max Cutting Capacity	10	10"	2	2	5	8	10
Cutting Diameter	72"	78"	36"	42"	48"	48"	54"
Width	76"	82"	42"	48"	54"	63"	63"
Weight	1575	1645	620	685	830	1,200	1,350
Height	27"	27"	24"	24"	24"	26"	27.5"
Overall Length	80"	80"	54"	60	66"	66"	70"
Overall Width	76"	82"	42"	48"	54"	63"	63"
Product Blades	5/8"x6"	5/8"x6"	1/2" X 4" AR400	1/2" X 4" AR400	1/2" X 4" AR400	1/2" X 4" AR400	1/2" X 4" AR400
Blade Carrier Type	LaserCut 3/4"	LaserCut 3/4"	Swing	Swing	Swing	Swing	Swing
Blade Rotation	CW	CW	CW	CW	CW	CCW	CCW
Number of Blades	4	4	2	2	3	3	3
Grinding Teeth	Yes	Yes	No	No	No	18 Carbides	18 Carbides
Deck Thickness	1/4"	1/4"	3/16"	3/16"	3/16"	1/4"	1/4"
Deck Material	Grade 50	Grade 50	Steel	Steel	Steel	Steel	Steel
Skid Shoe Thickness/Material	3/8"	3/8"	3/16"	3/16"	3/16"	1/2"	1/2"
Drive Protection	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Drive Type	Direct Drive	Direct Drive	Gearbox	Gearbox	Gearbox	Direct Drive	Direct Drive
Motor/Gearbox Coupler	N/A	N/A	Chain Coupling	Chain Coupling	Chain Coupling	Over Hung Load Adaptor	
Operating PSI Cont	4000	4000	3000	3000	3000	5000	5000
GPM Flow	30-45 GPM	30-45 GPM	12-20 GPM	12-20 GPM	20-25 GPM	26-38 GPM	33-45 GPM
Open or Closed Front	Open	Open	N/A	N/A	N/A	N/A	N/A
Chains Y/N	No	No	Yes	Yes	Yes/Removeable	Yes/Removeable	Yes/Removeable

Specifications are subject to change



LAND CLEARING ATTACHMENTS

Specifications - PTO

Model	SS24PTO	SS34PTO
Recommended HP	25-60 HP	45-90 HP
Hydraulic GPM	5-20 GPM	5-20 GPM
Rotor Size	24"	34"
Number of Teeth	58	92
Tooth Construction	Carbide steel bolt-in	Carbide steel bolt-in
Cutting Wheel Speed	810 RPM	810 RPM
Cutting Height	25" above ground	25" above ground
Cutting Depth	12" below ground	14" below ground
Maximum Cutting Depth (per pass)	6"	8"
Maximum Horizontal Cut	22"	33"
Swing Arc	65°	65°
Hub Torque	803 ft-lb	803 ft-lb
Over Torque Protection	Slip clutch	Slip clutch
Hitch Category	Cat. I or II	Cat. II
Remotes Required (hydraulic)	1 or 2	1 or 2
Requires 12 Volt DC	No	No
Input Speed	540	540
Weight/Width/Length	700 lb./41"/66.5"	1,000 lb./49"/78"

Options

External Control

Replacement Teeth (each)

Model	HD60 3PT	HD72 3PT
Overall Height	36"	36"
Overall Length	89"	101"
Deck Length	72"	84"
Overall Width	65"	77"
Cutting Width	60"	72"
Deck Thickness	1/4"	1/4"
Shipping Weight	1,040 lb.	1,240 lb.
Hitch Category	Cat. I	Cat. I & II
Input RPM	540	540 RPM
HP Range	25-50 HP	40-90 HP

Specifications are subject to change



LAND CLEARING ATTACHMENTS

DESIGNED FOR DURABILITY

BUILT TO PERFORM



(844) 692.5800

info@brushfox.com

www.brushfox.com

Products and Specifications are subject to change. Photos are stock photos, products you receive may have variations depending on the options chosen